


UL2464 鋁箔 +E 單隔離電纜

UL2464 鋁箔 +E 單隔離電纜

- 適用領域及範圍：自動迴路控制、儀器設備之訊號控制、中央監控類比訊號傳輸。
- 額定電壓：300V
- 額定溫度：80°C
- 導體：鍍錫軟銅線 T.C
- 絕緣：SR-PVC 半硬質聚氯乙烯
- 遮蔽：鋁箔 A+ 地線 E
- 被覆：PVC 聚氯乙烯
- 規範：通過 UL2464 標準。

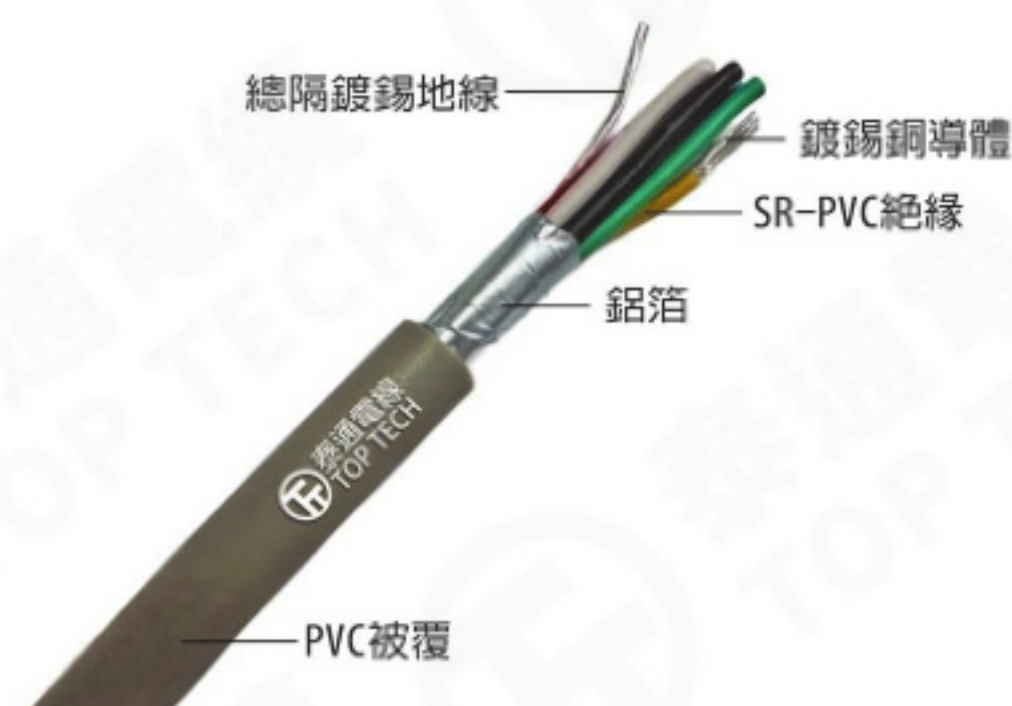

產品類別	產品編號	截面積 × 芯數 AWG(#) × C	導體構造 NO./mm	絕緣厚度 mm	絕緣外徑 mm	被覆厚度 mm	完成外徑 mm	最大導體電阻 Ω/km	最小絕緣電阻 MΩ-km
UL2464 鋁箔 +E 單隔離電纜 (24AWG)	IS#2402	24AWG × 2C	7/0.20	0.229	1.10	0.76	3.6	88.6	15
	IS#2403	24AWG × 3C	7/0.20	0.229	1.10	0.76	4.0	88.6	15
	IS#2404	24AWG × 4C	7/0.20	0.229	1.10	0.76	4.5	88.6	15
	IS#2406	24AWG × 6C	7/0.20	0.229	1.10	0.76	5.1	88.6	15
	IS#2407	24AWG × 7C	7/0.20	0.229	1.10	0.76	5.1	88.6	15
	IS#2409	24AWG × 9C	7/0.20	0.229	1.10	0.76	6.2	88.6	15
	IS#2410	24AWG × 10C	7/0.20	0.229	1.10	0.76	6.0	88.6	15
	IS#2412	24AWG × 12C	7/0.20	0.229	1.10	0.76	7.0	88.6	15
	IS#2416	24AWG × 16C	7/0.20	0.229	1.10	0.76	7.6	88.6	15
	IS#2420	24AWG × 20C	7/0.20	0.229	1.10	0.76	8.0	88.6	15
	IS#2425	24AWG × 25C	7/0.20	0.229	1.10	0.76	9.0	88.6	15
	IS#2437	24AWG × 37C	7/0.20	0.229	1.10	0.76	10.0	88.6	15
IS#2450	24AWG × 50C	7/0.20	0.229	1.10	0.76	12.0	88.6	15	
UL2464 鋁箔 +E 單隔離電纜 (22AWG)	IS#2202	22AWG × 2C	17/0.16	0.229	1.30	0.76	4.2	62.5	15
	IS#2203	22AWG × 3C	17/0.16	0.229	1.30	0.76	4.4	62.5	15
	IS#2204	22AWG × 4C	17/0.16	0.229	1.30	0.76	4.8	62.5	15
	IS#2206	22AWG × 6C	17/0.16	0.229	1.30	0.76	6.0	62.5	15
	IS#2207	22AWG × 7C	17/0.16	0.229	1.30	0.76	6.0	62.5	15
	IS#2209	22AWG × 9C	17/0.16	0.229	1.30	0.76	6.9	62.5	15
	IS#2210	22AWG × 10C	17/0.16	0.229	1.30	0.76	7.0	62.5	15
	IS#2212	22AWG × 12C	17/0.16	0.229	1.30	0.76	7.8	62.5	15
	IS#2216	22AWG × 16C	17/0.16	0.229	1.30	0.76	8.7	62.5	15
	IS#2220	22AWG × 20C	17/0.16	0.229	1.30	0.76	9.0	62.5	15
	IS#2225	22AWG × 25C	17/0.16	0.229	1.30	0.76	10.8	62.5	15
	IS#2237	22AWG × 37C	17/0.16	0.229	1.30	0.76	12.1	62.5	15
IS#2250	22AWG × 50C	17/0.16	0.229	1.30	0.76	13.8	62.5	15	